

## STEAM DESUPERHEATER SPECIFICATION SHEET

Please provide the requested information and fax to Schutte & Koerting at 215-639-1597 or email sales@s-k.com

COMPANY NAME: \_\_\_\_\_ CONTACT: \_\_\_\_\_


ADDRESS: \_\_\_\_\_ CITY, STATE, ZIP CODE: \_\_\_\_\_

PHONE NUMBER: \_\_\_\_\_ FAX NUMBER: \_\_\_\_\_

EMAIL: \_\_\_\_\_

1 SUPERHEATED STEAM			
Flow Rate:	Max:		pph
	Min:		pph
Pressure:			psig
Temperature:			°F
3 ATOMIZING / UPSTREAM STEAM			
<i>(If applicable)</i>			
Pressure:			psig
Temperature:			°F

2 DESUPERHEATED STEAM		
Pressure:		psig
Temperature:		°F
4 COOLING WATER		
Pressure:		psig
Temperature:		°F

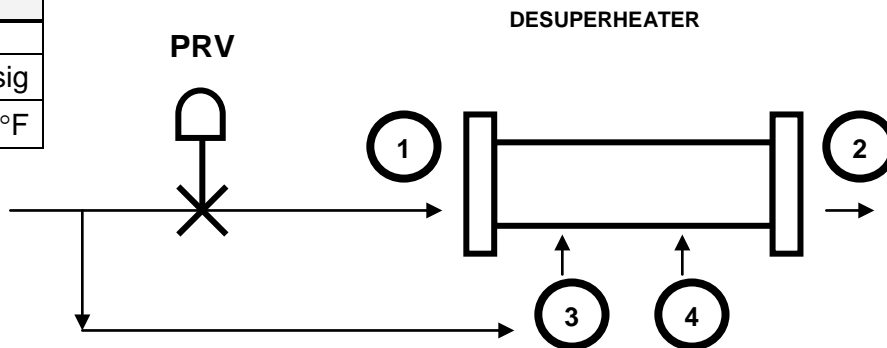

Construction Requirements			
<b>Mounting:</b>	<input type="checkbox"/> Vertical	<input type="checkbox"/> Horizontal	
<b>Connections:</b>	1. Main Line:	<input type="checkbox"/> _____ lb. flanged	<input type="checkbox"/> Butt Weld
	2. Cooling Water:	<input type="checkbox"/> _____ lb. flanged	<input type="checkbox"/> Butt Weld <input type="checkbox"/> NPT
	3. Atomizing Steam:	<input type="checkbox"/> _____ lb. flanged	<input type="checkbox"/> Butt Weld <input type="checkbox"/> NPT
<b>Design Pressure:</b>	_____ psig	<b>Design Temperature:</b>	_____ °F
<b>Materials of Construction:</b>			
<b>Special Requirements, Codes, Etc.:</b>			
<b>Comments:</b>			